

Liberty

LibertyRib II™ Wall and Roof Panel

RIGHT FOR SO MANY REASONS®

The LibertyRib II™ panel is an attractive, economical and low-maintenance wall and roof panel that can be used for agricultural, commercial, industrial and self-storage applications. It can also be used as an interior liner panel. As a wall system, LibertyRib II is more cost-efficient than wood, concrete or masonry alternatives.



AN ECONOMICAL ALTERNATIVE

The LibertyRib II wall and roof panel is a great alternative for those looking for building applications that are cost-effective, while remaining attractive and durable. LibertyRib II is especially useful for agricultural, commercial and industrial applications. Self-drilling, color-matched fasteners and a 36" panel width allow for quick and easy installation in the field. The panels are designed to add structural strength and resilience to your project. Sealant applied to every metal-to-metal contact point ensures a weather-resistant roof. The panel's long lengths ensure a weatherproof seal.

LONG-LASTING PAINT FINISHES


LibertyRib II is available in two paint finishes: FreedomCote™ and Kynar. The FreedomCote finish, a thermoset coating system composed of silicon polyester resin, is backed by a 25-year film integrity warranty. Liberty offers a 30-year warranty on its Kynar finish, a coating system made from fluoropolymer resin. Both finishes are long-lasting for their proven resistance to chalking, fading and chemicals.



- Features**
- Economical
 - 36" coverage with lengths up to 41'-0"
 - Self-drilling, color-matched fasteners for easy installation
 - Roof slopes can be as low as 1/2:12


STANDARD COLORS

FreedomCote™

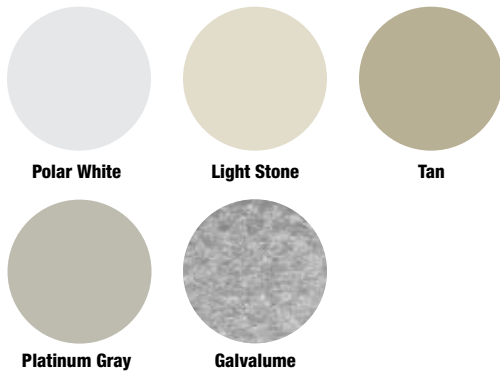

PREMIUM COLORS

Kynar

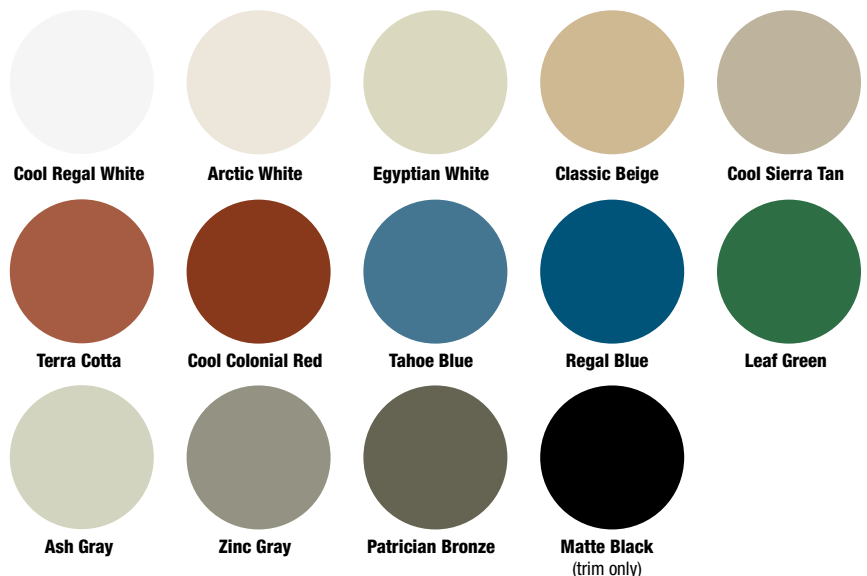

NOTE: All color selections are close representations, but are limited by processing and viewing conditions.

Profile Information

LibertyRib II™ Wall and Roof Panel

Liberty

RIGHT FOR SO MANY REASONS®

Roof Slope

- Roof slopes can be as low as ½:12.
- Liberty recommends that a roof sealant be applied on sidelaps on all roofing applications.

Substructure

- LibertyRib II roof panel can be applied over open framing or a solid substrate.
- Substructure must be properly aligned and uniform to avoid panel distortion.

Coverage

- 36" with a 1¼" rib height

Length

- Available in lengths up to 41'-0"

Availability



- 26-gauge with FreedomCote™ Kynar and acrylic coated Galvalume® finish
- 24 and 22-gauge are available at an additional cost.
- Minimum quantity requirements may apply.
- Minimum and extended lead times for custom colors may apply.

Applications

- Exterior wall or roof panels for agricultural, commercial or industrial use

Fastening System

- Direct fasten (exposed)

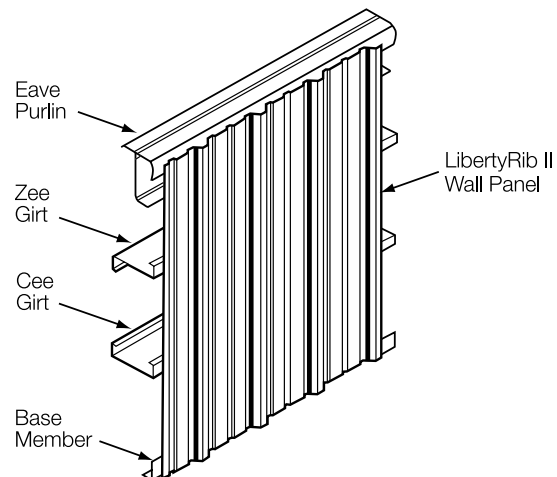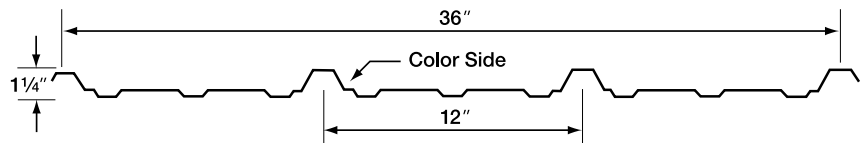

All panels formed from light gauge metal may exhibit waviness, also known as "oil canning," commonly occurring in, but not restricted to, flat portions of a panel. This inherent characteristic is not a defect of material and is not a cause for rejection.

NOTE: Liberty Building Systems' products are constantly being improved; therefore, the information contained herein is subject to change without notice. Before finalizing project details, contact Liberty Building Systems for the latest information.



Liberty Building Systems
877-505-4596 • Fax: 901-372-1341
www.LibertyBuildings.com